



Prestige Family

iLUMi by  POWERQ

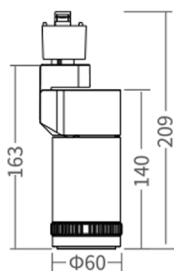

3-pin track adaptor

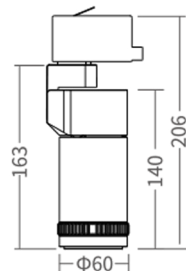


4-pin track adaptor

AIOLOS FAMILY 15W



Color Temperature



3000K

4000K

Color Quality

- CRI 80+
- CRI 90+

Dimming Protocol

1-10V DALI

Mounts

Surface Mounted Suspending Wall-Mounted

Application



Residential Spaces



Commercial Environments



Offices



Architectural & Specialty Design



Hospitality



Healthcare Facilities



ACCESSORIES

OPTICAL ACCESSORY



Honeycomb Filter



Circular Small
Circular Big
Square
Rectangular
Wall Washing

FEATURES

- Stylish and compact design with integrated driver.
- Excellent modular combination concept: integrated driver+ different fixture bases, DIY to get different lighting solutions and easy for maintenance.
- Beam angle adjustable mechanism provides endless beam options from a narrow to wide flood distribution by simply rotate the rubber ring.
- Light efficiency is up to 90lm/W.
- Privately-designed joints can hold the track head at any positions without malfunctions.
- 360°+ rotation without dead angle and 90° vertical aiming
- Use AIOLOS family to get an unified impression in one environment.

OVERVIEW

ELECTRICAL

Power	15W
Voltage	220-240V / 100-120V / 100-277V AC
Frequency	50/60Hz

LIGHT & OPTICS

Beam Angle	Color Temperature	Lumen Output (CRI 80+)	Lumen Output (CRI 90+)
15° - 45° 25° - 60°	3000K	1191lm	1072lm
	4000K	1280lm	1152lm

GENERAL

Housing color	White, Black, Silver
Operating temperature	-20°C to 45°C
Warranty	5 years limited warranty
Standard	ETL Listed to US and Canadian standards for damp locations. (IC) ETL listed for direct contact w/insulation.

DETAILS



High lumen efficiency
>90lm/W




Very reliable joint



Variety optical
accessories for choice

LIGHT DISTRIBUTION

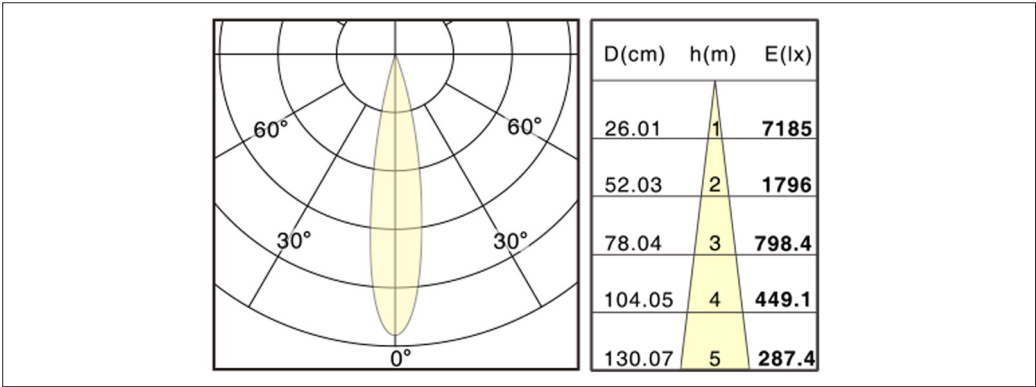

MOUNTS

SURFACE-MOUNTED



SUSPENDING



WALL-MOUNTED

