





ARA 15W

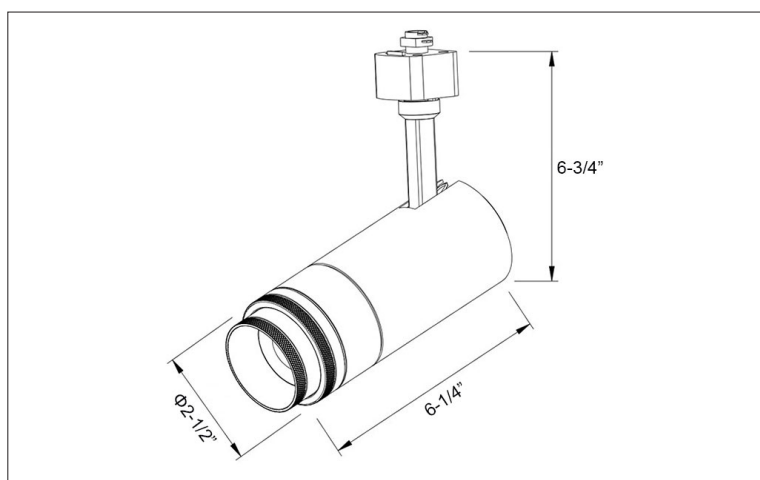

Color Temperature



Color Quality

- CRI >90

Dimming Protocol

Dimmable (Optional)

Models

H - Mounting

J - Mounting



Application



Residential Spaces



Commercial Environments



Offices



Architectural & Specialty Design



Hospitality



Healthcare Facilities




H - Mounting




J - Mounting

DETAILS

Leica
A-Zoom
15°

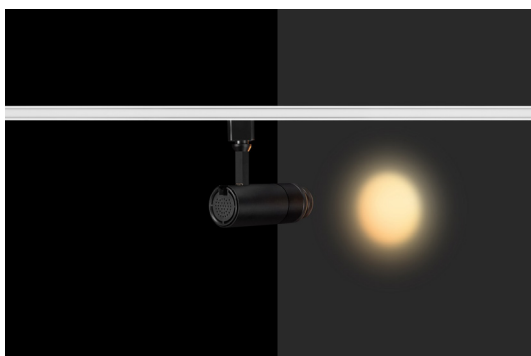

Leica
A-Zoom
60°

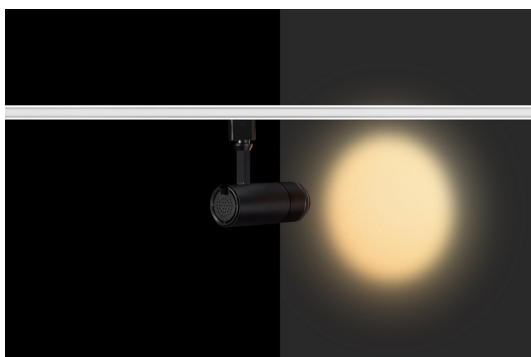

OVERVIEW

ELECTRICAL

Power	15W
Voltage	100-277V AC
Frequency	50/60Hz
Power factor	> 0.95
Dimming protocol	Dimmable (optional)
Power supply	Lifud

LIGHT & OPTICS

Beam optic	15°, 60°
Lumen Output	WW - 1050-1350lm CW - 1100-1380lm
Color quality	CRI >90
Light color	2700K to 6000K

GENERAL

Housing Material	Aluminum + PC + High-precision air fan
Housing color	White / Black
Dimensions	Φ65 x 178 x 182 mm
Function	360° focusing + 320° lateral adjustable + 90° Vertical adjustment
Operating temperature	-20°C to 40°C
Lifespan	50000h
Warranty	3 years
Standard	cETLus