


Prestige Family

iLUMi by  POWERQ



LUMA

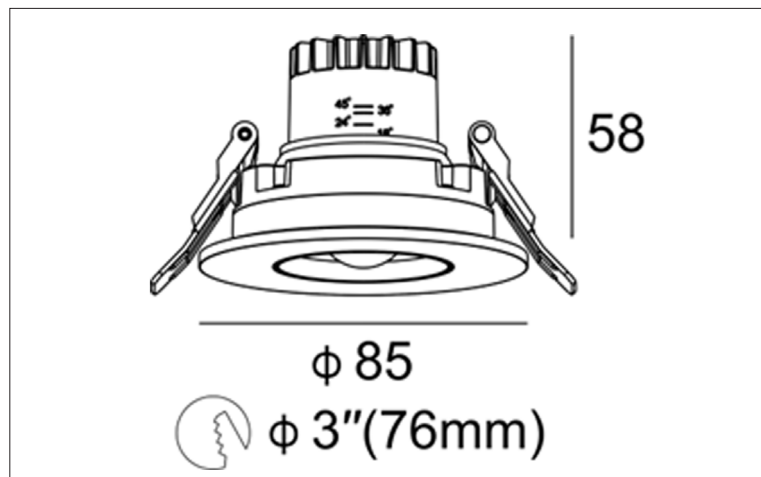

Color Temperature



Color Quality

• CRI >90

Dimming Protocol

Dimmable (Optional)

Trim Shape

Round

Square

Round Bevel



Application



Residential Spaces



Commercial Environments



Offices



Architectural & Specialty Design



Hospitality



Healthcare Facilities



ACCESSORIES



Recessed Trims



Trimless Pre-embedded

OVERVIEW

ELECTRICAL

Power	9W, 12W
Voltage	100-277V AC / 347V AC
Frequency	50/60Hz
Power factor	> 0.90
Dimming protocol	Triac dimming

LIGHT & OPTICS

Beam optic	18°, 24°, 36°, 45°
Luminous efficacy	≥82Lm/W
Color quality	CRI >90
Light color selectable	2700K, 3000K, 3500K, 4000K, 5000K

GENERAL


Function	Tilt 0° to 15°
Operating temperature	-20°C to 40°C
Lifespan	50000h
Warranty	5 years
Standard	cETLus

VERSION

Available in 2.5 inch & 4 inch
Trim & trimless
Modular trims


FEATURES

- High efficient design
- COB Solution. The estimated service life is 50,000 hours
- The beam angle is adjustable, enabling a range from 18° to 45°
- Spring clips hold fixture firmly to ceiling
- Can achieve a swing angle ranging from 0° to 15°
- Modular design: Multiple face rings can be replaced




DIMENSIONS

2.5 Inch

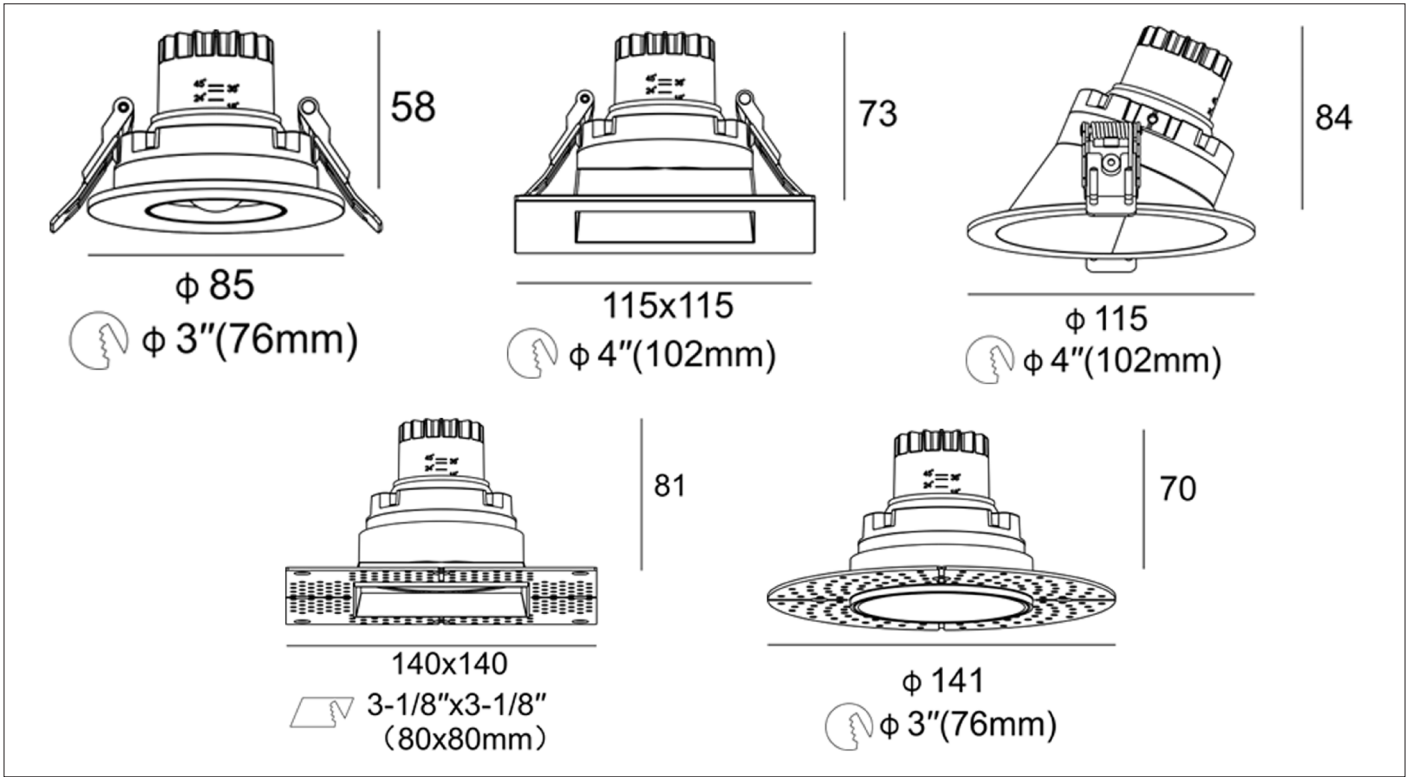


4 Inch

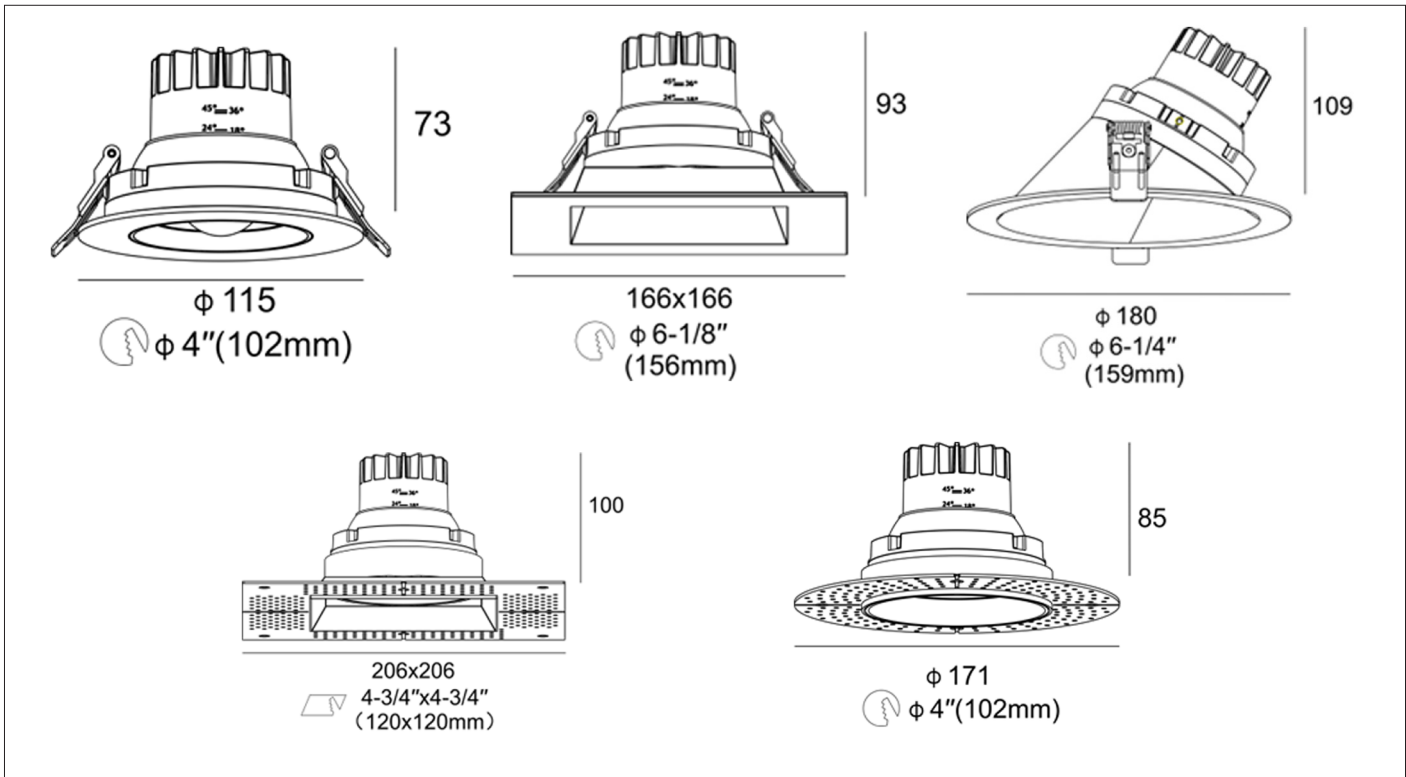

LIGHT DISTRIBUTION

2.5 Inch

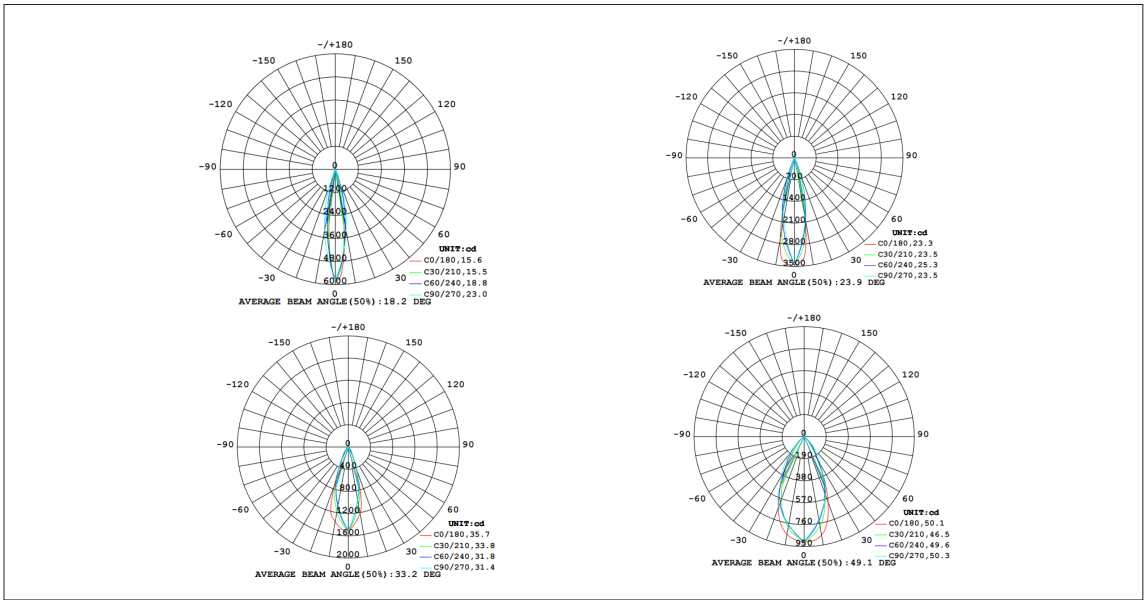

4 Inch

