





## MILO 12

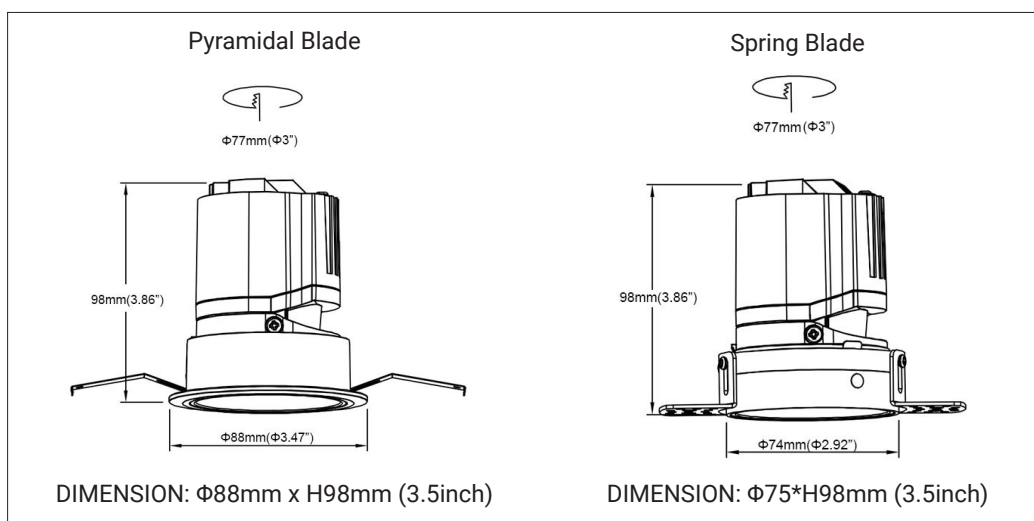

### Color Temperature



### Color Quality

• CRI >90

### Dimming Protocol

0-10V TRIAC

### Models

ROUND

SQUARE



Pyramidal Blade

Spring Blade

Pyramidal Blade

Spring Blade

### Application



Residential Spaces



Commercial Environments



Offices



Architectural & Specialty Design



Hospitality



Healthcare Facilities

ROUND




SQUARE



## DIMENSION


Model: SQUARE

Pyramidal Blade

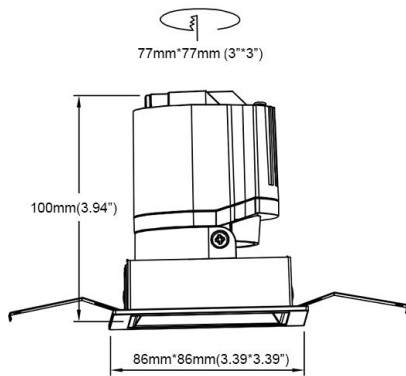

DIMENSION: 86mm\*86mm\*H100mm

Spring Blade

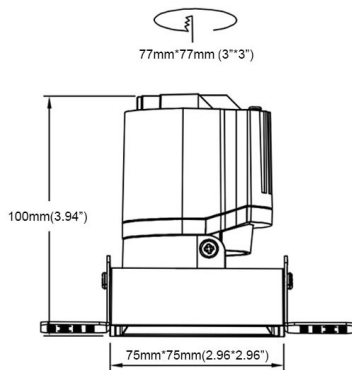

DIMENSION: 75mm\*75mm\*H100mm

## OVERVIEW

### ELECTRICAL

|                  |                            |
|------------------|----------------------------|
| Power            | 8-12W                      |
| Voltage          | AC120V / 220V / AC100-277V |
| Frequency        | 50/60Hz                    |
| Power factor     | > 0.95                     |
| Dimming protocol | 0-10V / TRIAC              |

### LIGHT & OPTICS

|               |                    |
|---------------|--------------------|
| Beam angle    | 15°, 24°, 36°, 60° |
| Lumen Output  | 1020lm             |
| Color quality | CRI 90+            |
| Light color   | 2700K to 7000K     |

### GENERAL

|                       |                                                                                                              |
|-----------------------|--------------------------------------------------------------------------------------------------------------|
| Housing Material      | Aluminum 6063 + PC                                                                                           |
| Housing color         | White / Black + Champagne                                                                                    |
| Reflective cup color  | Shiny Black, Shiny White, Matt Black, Matt White, Silver                                                     |
| Operating temperature | -20°C to 40°C                                                                                                |
| Lifespan              | 50000h                                                                                                       |
| Warranty              | 5 years                                                                                                      |
| Standard              | ETL Listed to US and Canadian standards for damp locations. (IC) ETL listed for direct contact w/insulation. |