





MILO 30

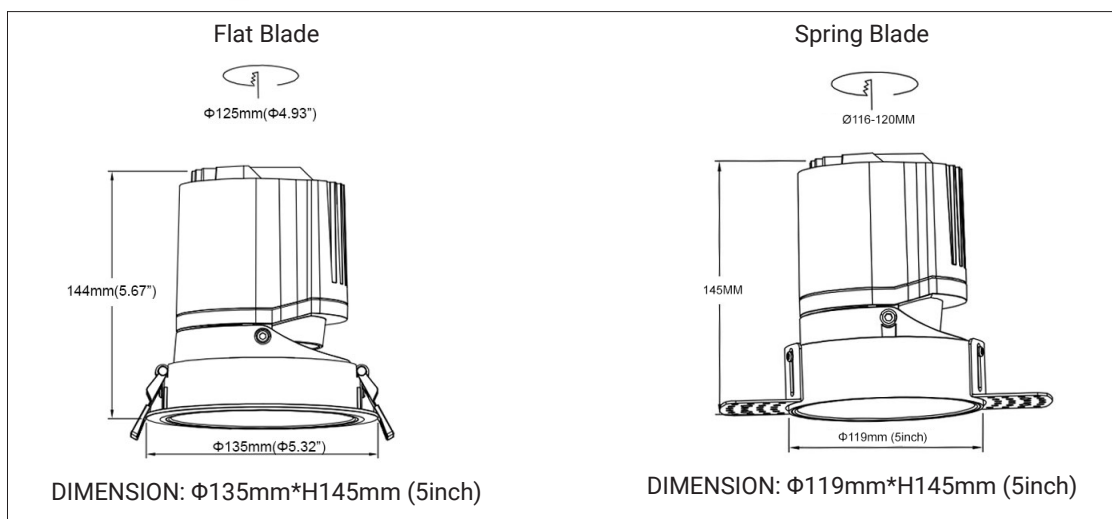

Color Temperature



Color Quality

• CRI >90

Dimming Protocol

0-10V TRIAC

Models

ROUND



Flat Blade



Spring Blade

SQUARE



Flat Blade



Spring Blade

Application



Residential Spaces



Commercial Environments



Offices



Architectural & Specialty Design




Hospitality



Healthcare Facilities

ROUND

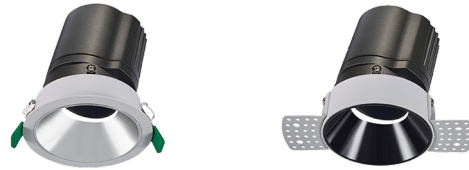


SQUARE



DIMENSION


Model: SQUARE

Flat Blade

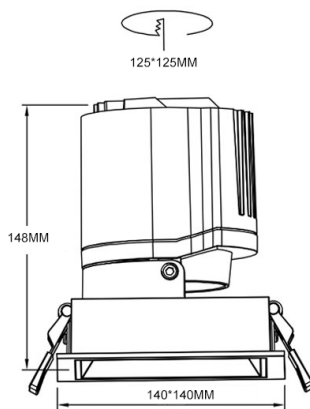

DIMENSION: 140mm*140mm*H148mm (5inch)

Spring Blade

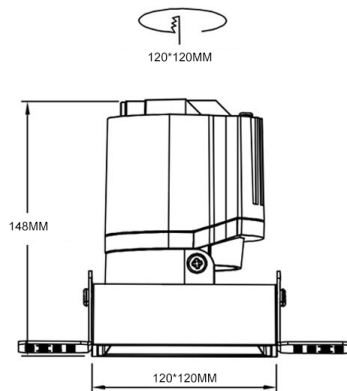

DIMENSION: 120mm*120mm*H148mm (5inch)

OVERVIEW

ELECTRICAL

Power	25-30W
Voltage	AC120V /220V /AC100-277V
Frequency	50/60Hz
Power factor	> 0.95
Dimming protocol	0-10V / TRIAC

LIGHT & OPTICS

Beam optic	15°, 24°, 36°, 60°
Lumen Output	2550
Color quality	CRI 90+
Light color	2700K to 7000K

GENERAL

Housing Material	Aluminum 6063 + PC
Housing color	White / Black
Reflective cup color	Shiny Black, Shiny White, Matt Black, Matt White, Silver
Operating temperature	-20°C to 40°C
Lifespan	50000h
Warranty	5 years
Standard	ETL Listed to US and Canadian standards for damp locations. (IC) ETL listed for direct contact w/insulation.