





SHURA 20W

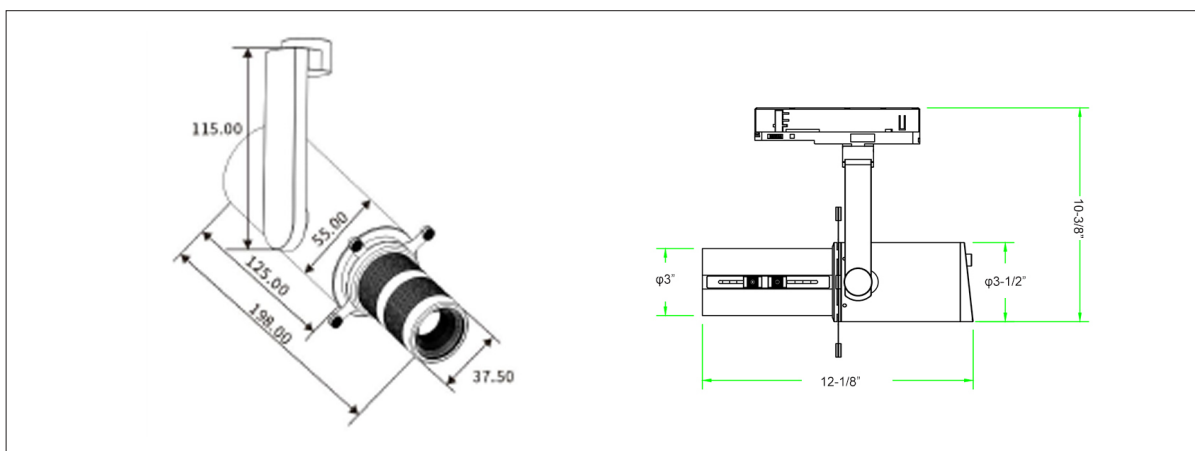

Color Temperature



Color Quality

• CRI >90

Dimming Protocol

Dimmable (Optionnal)

Models

Also available in 30W

Application



Museum



Residential Spaces



Offices



Commercial Environments



Hospitality



Architectural & Specialty Design



OVERVIEW

ELECTRICAL

Power	20W
Voltage	85-277V AC
Frequency	50/60Hz
Power factor	> 0.95
Dimming protocol	Dimmable (optionnal)
Power supply	Lifud

LIGHT & OPTICS

Light effect	60lm/w
Beam optic	18°-36°
Light source	WW - 1150-1450lm CW - 1200-1480lm
Color quality	CRI >90
Light color	2700K to 6000K

GENERAL

Housing Material	Aluminum + PC + High-precision air fan
Housing color	Black
Dimensions	Φ7.5 x 198 x 143 mm
Function	320 ° lateral adjustable +90° Vertical adjustment
Operating temperature	-20°C to 40°C
Lifespan	50000h
Warranty	3 years
Standard	cETLus