




SOLARIS DOUBLE 40



Color Temperature

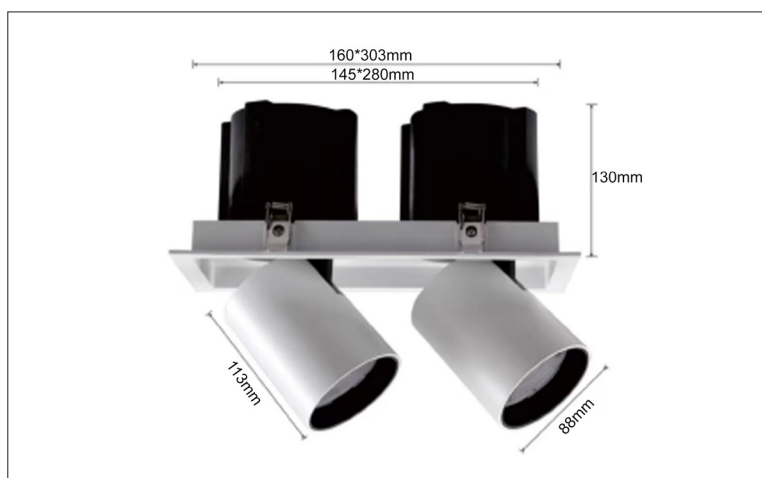

Color Quality

• CRI 90+

Dimming Protocol

ON/OFF 0-10V DALI TRIAC

Application



Residential
Spaces



Commercial
Environments



Offices



Architectural &
Specialty Design



Hospitality



Healthcare
Facilities



OVERVIEW

ELECTRICAL

Power	40W = 20*2W
Voltage	85-277V AC
Frequency	50/60Hz
Power factor	> 0.95
Dimming protocol	On-off / 0-10V / DALI / TRIAC
Power supply	Lifud / PHILIPS

LIGHT & OPTICS

Light effect	100lm/w
Beam optic	15°, 24°, 36°
Light source	3600lm
Color quality	CRI 90+
Light color	2800K to 7000K

GENERAL

Housing Material	Aluminum 6063 + PC
Housing color	White / Black
Dimensions	303 x 160 x 130 mm
Size	280 x 145 mm
Operating temperature	-20°C to 40°C
Lifespan	50000h
Warranty	5 years
Standard	ETL Listed to US and Canadian standards for damp locations. (IC) ETL listed for direct contact w/insulation.