




VIVIA MINI 8W - 3"



Color Temperature

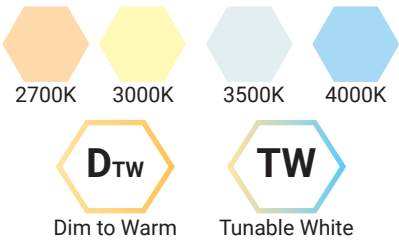

Application



Color Quality


- CRI 90+
- SDCM ≤2

Dimming Protocol

ON/OFF 0/0-10V DALI TRIAC DMX512

Trim Shape





ACCESSORIES

OPTICAL ACCESSORY



Honeycomb



Soft Lens

SECONDARY REFLECTOR COLOR



Matt Black



Matt White



Matt Silver



Gold

FEATURES

- Canless IC Rated, no need extra housing.
- 100% light distribution without being blocked at any angle.
- Rotate and tilt with audible and tactile feedback for precise adjustments.
- Interchangeable trims and optical accessories.
- Choose between remodel and new construction (IC and Non-IC) installation, round or square, frame or frameless.
- All available in a variety of finishes and colors.
- Classic White, Dim to Warm, Tunable White.
- IP65 rated for wet location.
- Modular structure for easier and cost effective SKU management.
- Service the LED optics and Driver from above the ceiling.

OVERVIEW

ELECTRICAL

Power	10W, 15W (IC rated: 8W Max)
Voltage	120-277V AC
Frequency	50/60Hz
Power Factor	> 0.90
Dimming Protocol	On-off 0/1-10V / DALI / TRIAC / DMX512


LIGHT & OPTICS

LED type	COB
Lumen output	802lm (10W), 1125lm (15W)
Beam optic	Narrow Spot(10°,15°) / Spot(24°,36°) / Flood(50°)
Color quality	CRI 90+, SDCM ≤2
Light color	Static White: 2700K, 3000K, 3500K, 4000K Tunable White: 2700K-6500K Dim to Warm: 1800K-3000K

GENERAL

Frame color	Black
Trim color	White/Black
Operating temperature	-20°C to 40°C
Lifespan	>50000h @80% (L80)
Warranty	5 years limited warranty
Standard	ETL Listed to US and Canadian standards for damp locations. (IC) ETL listed for direct contact w/insulation.


LED Module




Trim for Hotel Series





Round Adjustable




Round Adjustable Trimless



Square Adjustable




Square Adjustable Trimless




Trim for Residential Series



Round Fixed (IP65)




Ultra Pinhole




Trim for Commercial Series




Round Adjustable




Square Adjustable



Dual Heads




Triple Heads

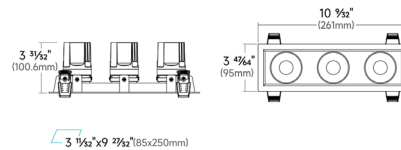

Trim for Deep-Anti Glare Series



Round Fixed



DETAILS

Modular Design



PHOTOMETRIC DATA (NON-DIMMING)

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)	MAX CANDELA (cd)
10W	3000K	90	10°	291	36	5116
			15°	794	79	5140
			24°	759	76	3340
			36°	802	80	1879
			50°	793	79	1392
15W	3000K	90	15°	1039	70	6890
			24°	1125	77	5006
			36°	1029	70	2739
			50°	980	67	1440

LIGHT DISTRIBUTION

