



Prestige Family

iLUMi by  POWERQ




ROUND

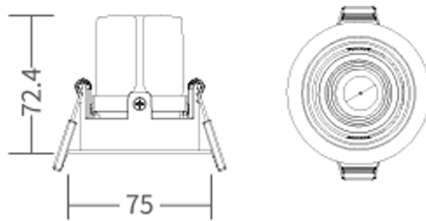

Cut out: 65mm

SQUARE

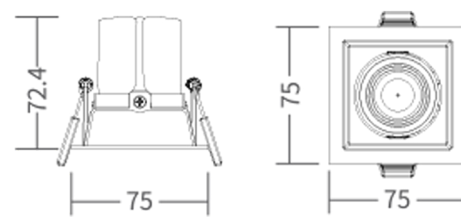


Cut out: 65x65 mm

VIVIA8



Color Temperature



Color Quality

• CRI 80+ • CRI 90+

Dimming Protocol

1-10V DALI

Models

ROUND SQUARE DOUBLE-SQUARE

Application



Residential Spaces



Commercial Environments



Offices




Architectural & Specialty Design



Hospitality



Healthcare Facilities

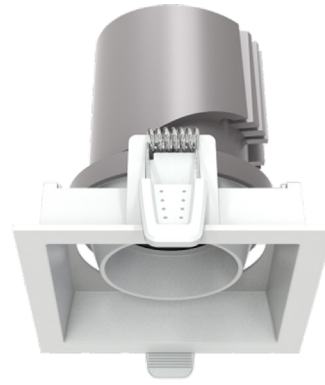

ACCESSORIES

ANTI-GLARE ACCESSORY



Honeycomb



Soft Lens

FEATURES

- Elegant & compact in its style, versatile in its using.
- Precise light control. 15°, 24°, 38°, 55° beam lens options.
- Round & square mounting rings with tiltable 30° axis. Also can be dual-head.
- Super modular design, replacing LED module, mounting ring, beam lens and anti-glare accessories without any needs for tools.
- IP20 is standard, IP44 is optional.

OVERVIEW

ELECTRICAL

Power	5W, 8W
Voltage	220-240V / 100-120V / 100-277V AC
Frequency	50/60Hz


LIGHT & OPTICS

Power	Beam Angle	Color Temperature	Lumen Output (CRI 80+)	Lumen Output (CRI 90+)
5W	38°	2700K	461lm	363lm
		3000K	478lm	377lm
8W		2700K	763lm	601lm
		3000K	793lm	625lm
Beam Angle		15°, 24°, 38°, 55°		


GENERAL

Housing color	Black
Operating temperature	-20°C to 40°C
Warranty	5 years limited warranty
Standard	ETL Listed to US and Canadian standards for damp locations. (IC) ETL listed for direct contact w/insulation.


DETAILS

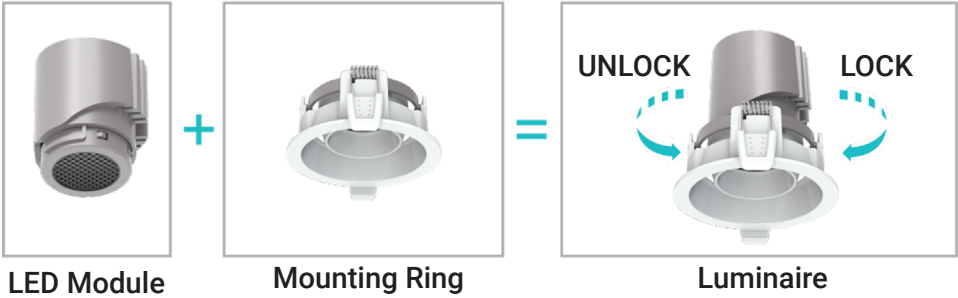

LIGHT DISTRIBUTION

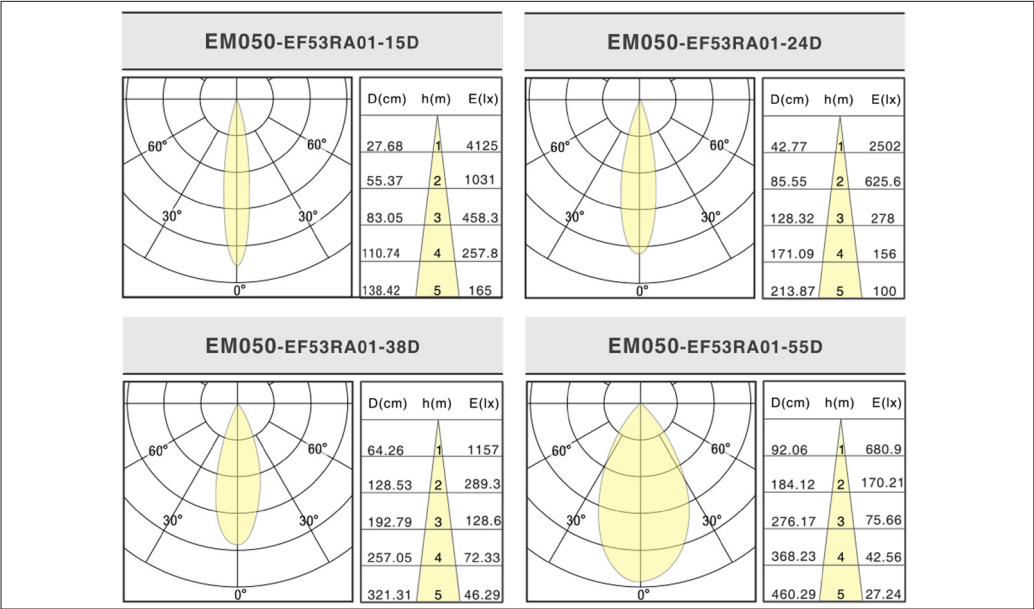

CEILING THICKNESS

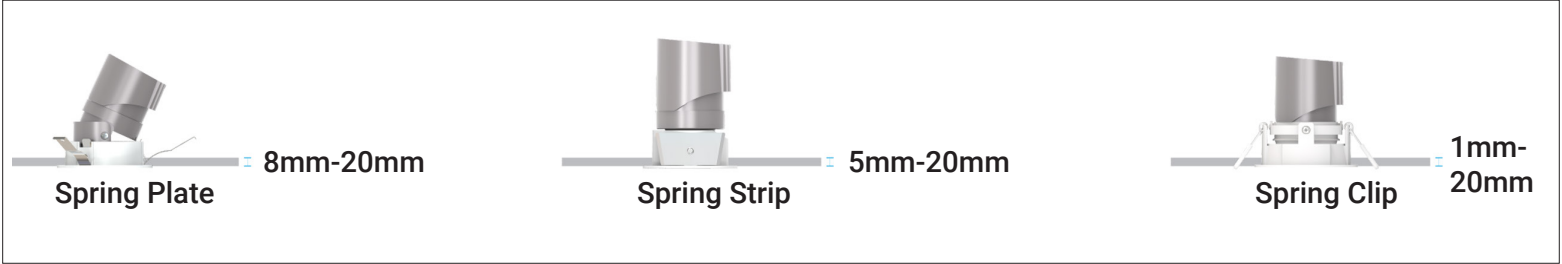

MODELS

ROUND



SQUARE



DOUBLE-SQUARE

